


ELEGRP



G19152L

# GFCI Outlet with night light function

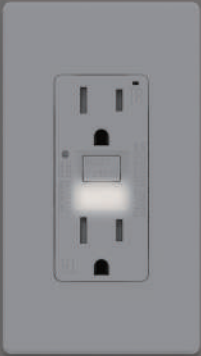

## GFCI (G19 series) with Night Light Function



### FEATURES

- LED guide light provides automatic ON/OFF based on light level, saves energy and meets convenient lighting needs
- Reduced depth makes it easy and fast to install in any electrical box
- Feature surge protection and lightning protection function withstanding 6 kilovolt. Performed 6000+ times factory test, which is twice the testing times of UL standard
- GFCI conducts self test within 5 seconds when power is on and repeatedly conducts self-test every 5 seconds to confirm that it can respond to a ground fault, which exceeds the UL standards of self-test frequency of 3 hours
- Easily see that power is available with "power on" indicator light
- Strictly tested as per or exceeds UL943 & UL498 requirements. Innovated Reset-Disable System ensures the GFCI cannot be reset once it reaches the "end of life". Reversed Wiring Prevention makes it no power at the GFCI outlet and downstream if the LINE / LOAD is miswired
- Can be installed into the ordinary wall as the controlling branch circuit for the public and family bedroom, kitchen, toilet, underground garage and other places. Also can be installed in the power generation equipment to provide an interface for the output of power supply

### SPECIFICATIONS

Model: G19152L

Safety Certification	E473428 (UL,CUL Certification)	
Application Standard	UL943, UL498	
Operating Temperature Range	-35°C ~ +66°C	
Rated Voltage	125Vac	
Rated Frequency	60Hz	
GFCI Rated Current	20A	
Residual Operating Current	4mA~6mA	
Residual Current Operating time	$T=(20/I)^{1.43}mS$	
Endurance	≥6000 times(UL requires 3000 times)	
Face Output Receptacle	2 groups 5-15R or 2 groups 5-20R (optional)	
Color	Back Cover	Black BL101
	Front Cover	Provided according to customers' demands
	Button (Test)	Provided according to customers' demands
Color Temperature (use with night light)	2700k-3200k	

